

19" Widescreen Flat Panel Industrial Displays

FEATURES

- **Industrial Grade** for demanding environments.
- **Precision-milled, Heavy-duty Bezels** ensure longer display life.
- **Polycarbonate Viewing Windows** are bulletproof and scratch-resistant.
- **Longlife Backlights** ensure trouble-free operation.
- **Multiple Touchscreen Options** for different applications and environments.
- **Easy upgrade of CRT to Flat Panel** without any cabinet modification.
- **Powder-coated 3/8" Thick Aluminum Bezels** are extremely durable and maintain appearance.
- **Polished Stainless Steel Bezels** are precision-milled from 3/16" plate.
- **Custom Colors and Private Labeling** for OEM manufacturers.
- **Available from Stock** in every configuration.
- **3 Year Warranty** on displays and electronics



Industrial Strength

STRONGARM's Flat Panel Displays are designed to survive the most demanding industrial applications. Because the display elements are built into precision-milled, solid aluminum or stainless steel bezels, they remain secure and free from stress. The possibility of life-shortening display deformation is significantly reduced when installed in a panel cut-out.

Current Technology

Unlike most other display offerings, STRONGARM displays are updated to the current technology immediately. You can be sure that the STRONGARM display you purchase today is not yesterday's trailing edge.

19" Widescreen Flat Panel Industrial Displays

Touchscreen Specifications



Resistive Touchscreen *(for 90% of all touchscreen applications)*

The Resistive Touchscreen uses a glass panel overlay with a uniform resistive coating. A polyester coversheet is tightly suspended over the top of the glass, separated by small, transparent insulating dots. The coversheet has a hard durable coating on the outer side and a conductive coating on the inner side. When the screen is touched, the conductive coating makes electrical contact with the coating on the glass. The voltages produced are the analog representation of the position touched. The controller digitizes these voltages and transmits them to the computer for processing.

Touch Activation Force	Less than 4 ounces, typical
Accuracy	0.080 inches, typical 0.180 inches, minimum
Touchpoint Density	4096 x 4096 or > 100,000 touchpoints/inch
Temperature	Exceeds display rating

19" Widescreen Flat Panel Industrial Displays

Dimensions

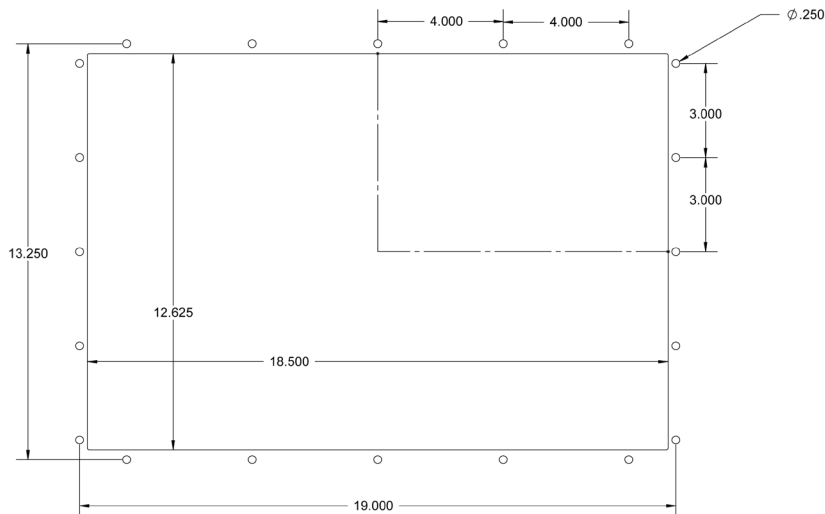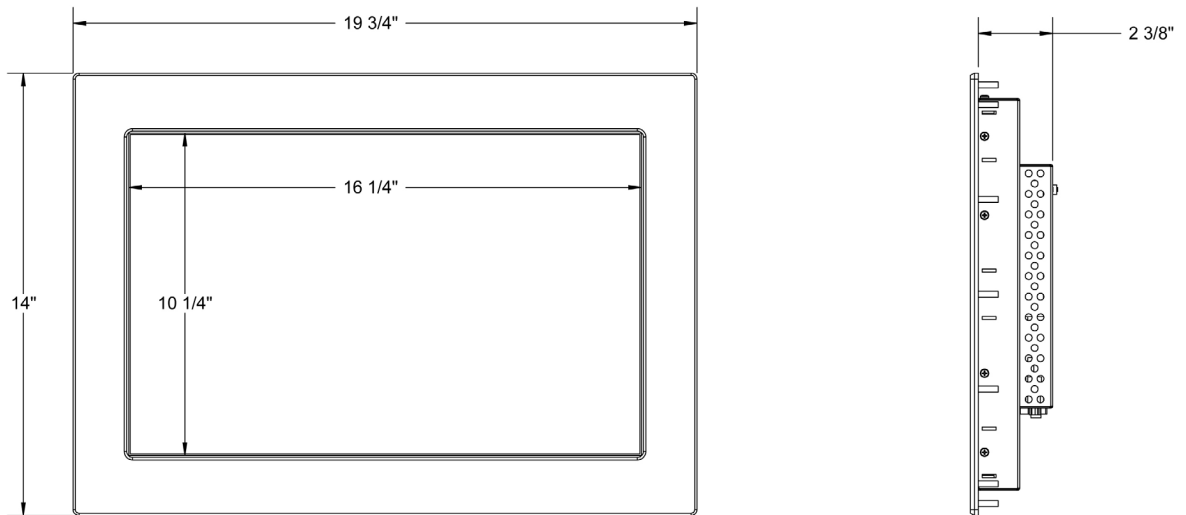

19" Widescreen Flat Panel Industrial Displays

Specifications

Display

Size:	19" Wide (16:10)
Brightness:	300 nits
Contrast Ratio:	800:1
Resolution:	1440 x 900
Colors:	16.7 M
Inputs:	VGA, DVI, S-Video, Composite

Power

Consumption	25W
Input	AC 90-264V~ 50/60Hz

Environmental

Operating Conditions

Temperature	32°F to 122°F (0°C to 50 °C)
Humidity	10 % to 80 % non-Condensing

Storage Conditions

Temperature	-4°F to 149°F (-20°C to 65°C)
Humidity	5 % to 95 % non-Condensing

Ordering Information

NEMA Series

304	NEMA 4/12
404	NEMA 4X

Touchscreens

0	None
T	Resistive

Transflective Display Option

0	None
T	Transflective Display

