

DATA SHEET

24" Widescreen Flat Panel Industrial Displays

Premium Quality STRONGARM Built Displays (NEMA 12/4/4X)

Features

- ▶ Designed for harsh and demanding **industrial environments**.
- ▶ **NEMA 4/4X** for washdown and wipedown applications.
- ▶ **Precision-milled, Heavy-duty Bezels** ensure a longer display life.
- ▶ **Polycarbonate Viewing Windows** are scratch-resistant and UV-resistant.
- ▶ **Touchscreen Options** for every industrial environment.
- ▶ **Powder-coated Aluminum Bezels** can be provided with custom colors or choose from a variety of stock colors.
- ▶ **Private Labeling** available for OEM manufacturers.
- ▶ **Class I Div II Certified** when mounted in a classified enclosure.
- ▶ **Stainless Steel Bezels** come standard with a #4 satin brush finish. 304 and 316 SS options.
- ▶ **Available from Stock**
- ▶ **Standard 3 year warranty**
- ▶ **UL/cUL/CB Listed, Type 12/4 and 12/4/4X (IP 65/66)**



• Industrial Strength

STRONGARM's PanelMount Displays are designed to survive the most demanding industrial applications. The display elements are integrated directly into precision-milled aluminum or stainless steel bezels and are protected by polycarbonate windows, or various touch screen options.

• Current Technology

STRONGARM uses the most current technology available. You can be sure that the STRONGARM display you purchase today is not yesterday's trailing edge.

STRONGARM's unique combination of technology and industrial design makes us the industry leader in industrial displays for every application.

Touchscreen Specifications

Resistive Touchscreen

The Resistive Touchscreen uses a glass panel overlay with a uniform resistive coating. A polyester coversheet is tightly suspended over the top of the glass, separated by small, transparent insulating dots. The coversheet has a hard durable coating on the outer side and a conductive coating on the inner side. When the screen is touched, the conductive coating makes electrical contact with the coating on the glass. The voltages produced are the analog representation of the position touched. The controller digitizes these voltages and transmits them to the computer for processing. Resistive touchscreens work well with almost any stylus-like object, and can also be operated with gloved and bare fingers.


Touch Activation Force	Less than 4 ounces, typical
Accuracy	0.080 inches, typical 0.180 inches, minimum
Touchpoint Density	4096 x 4096 or > 100,000 touchpoints/inch
Temperature	Exceeds display rating

STRONGARM®


425 Caredean Drive · Horsham, PA 19044 · 215.443.3400 · Fax 215.443.3002 · www.strongarm.com

©2014 STRONGARM, Inc.

Dimensions

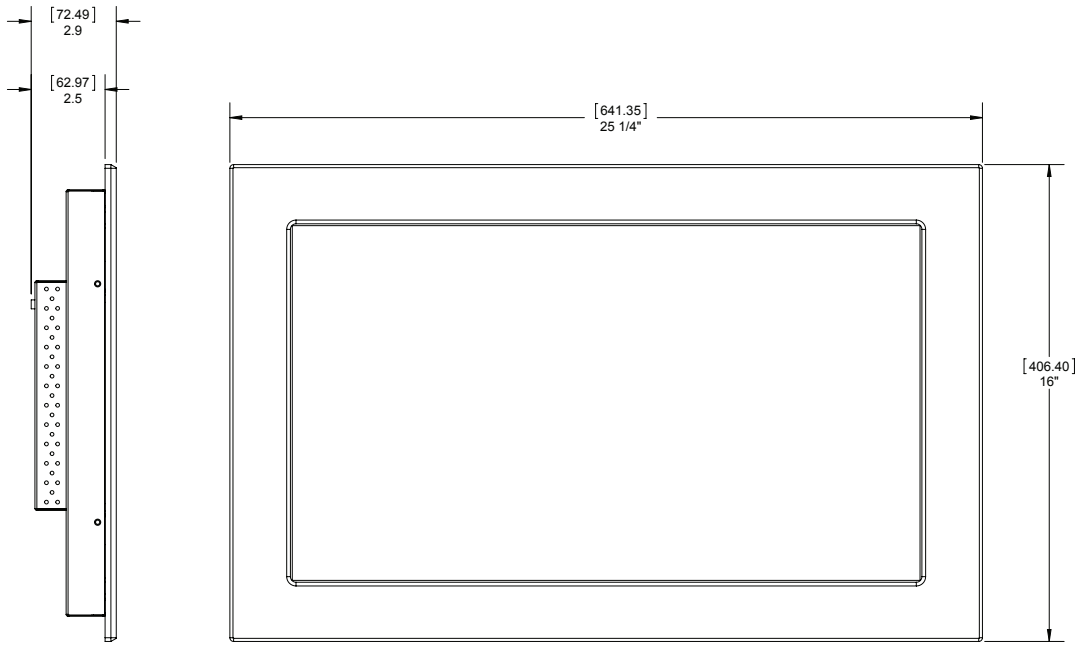

Cut-out Dimensions

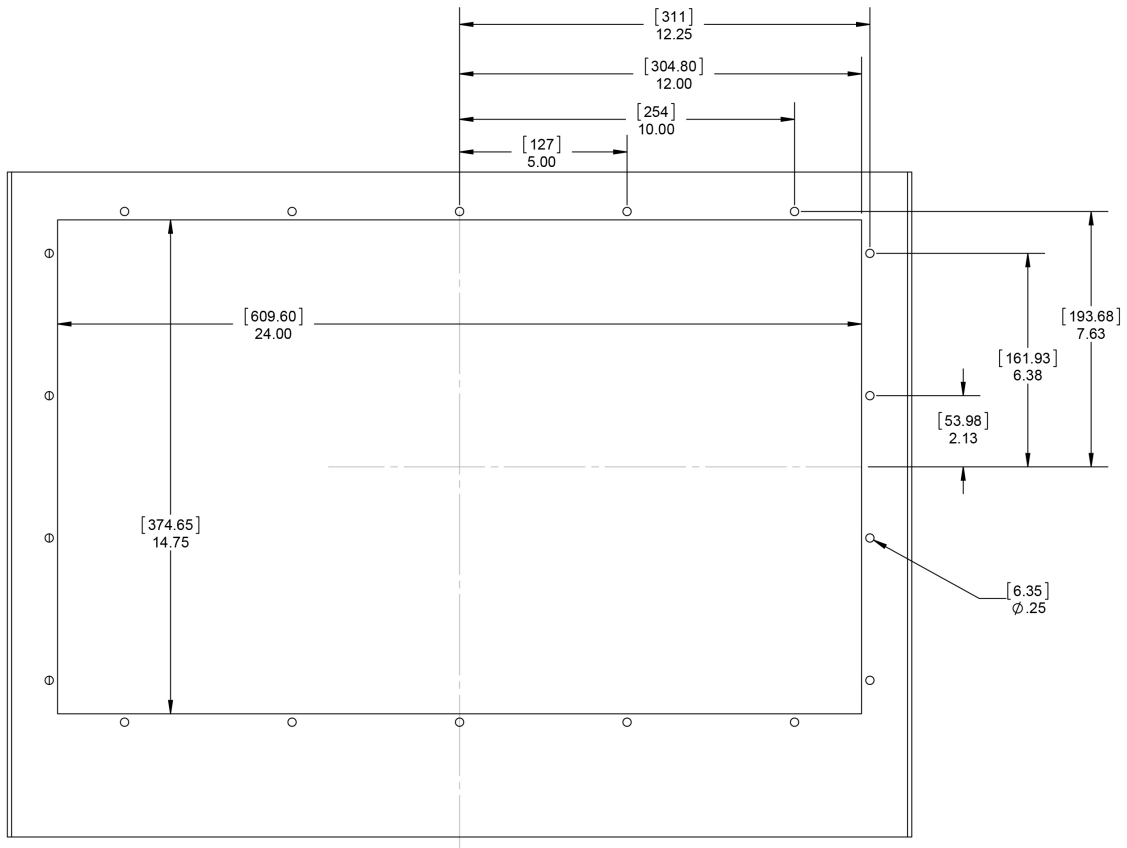

STRONGARM®

425 Caredean Drive · Horsham, PA 19044 · 215.443.3400 · Fax 215.443.3002 · www.strongarm.com

©2014 STRONGARM, Inc.

Specifications

Display

Size:	24" (16:9 Aspect Ratio)
Brightness:	250 nits
Contrast Ratio:	1000:1
Native Resolution:	1920 x 1080
Colors:	16.7 M
Other Supported Resolutions:	1600 x 900, 1366 x 768, 1280 x 720



Power

Consumption	25W
Input	AC 90-264V~ 50/60Hz (1.4A max) DC 12-24V (6A max)

Environmental

Operating Conditions	
Temperature	32°F to 122°F (0°C to 50 °C)
Humidity	20 % to 95 % non-Condensing
Storage Conditions	
Temperature	-4°F to 140°F (-20°C to 60°C)
Humidity	5 % to 95 % non-Condensing


Physical

Weight	No Touchscreen: NEMA 4/12: 13.2 lb (6.0 kg) NEMA 4X: 13.9 lb (6.3 kg)
	Resistive Touchscreen: NEMA 4/12: 14.0 lb (6.3 kg) NEMA 4X: 15.0 lb (6.8 kg)

Connections

Video Input	DVI, VGA
--------------------	----------

Ordering Information

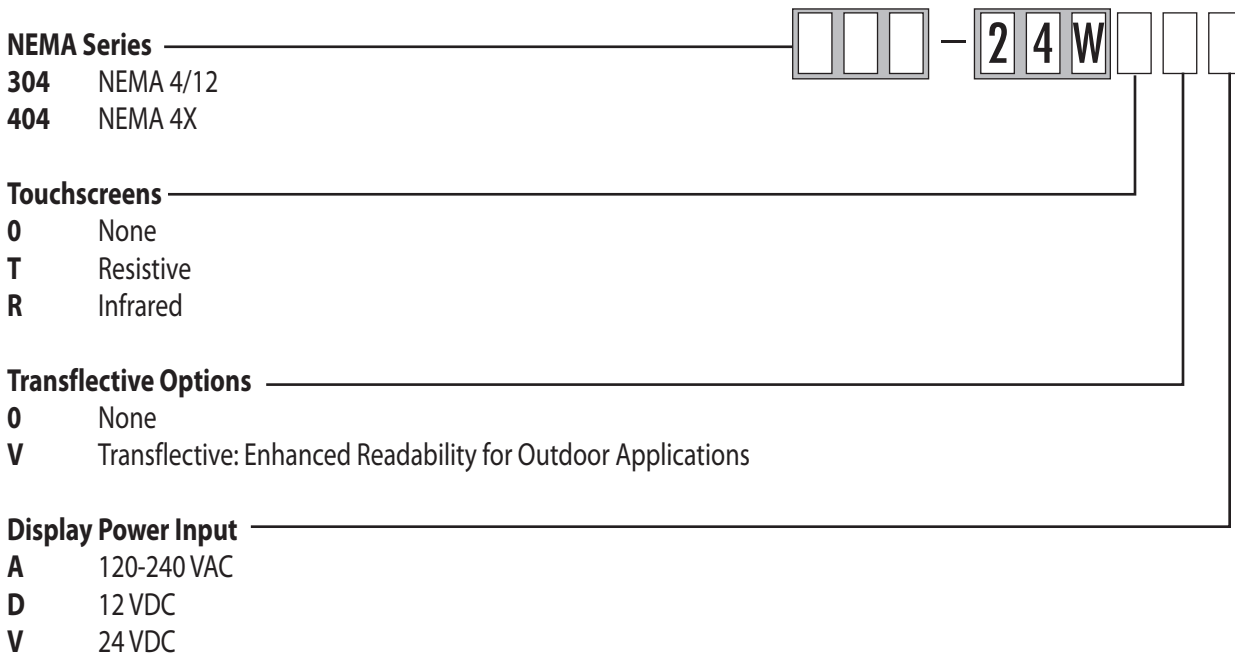

STRONGARM®